

Liberty International Trucks of NH

DPF Cleaning on All Makes & Models

Cleaning Early Saves Money and Preserves Filter Capacity!

Experiencing Excessive Re-Gen on a 2007 and later Emissions Truck? Do you have a truck with more than 250,000 miles? Bring the truck or filter to us to be tested and cleaned.

Diesel Particulate Filter (DPF) Cleaning

Liberty International Trucks of NH offers a full line of cleaning services for Diesel Particulate Filters (DPF), incorporating pneumatic cleaning, testing and thermal regeneration equipment. Our business process focuses on the customer needs with inspections, air flow testing, Level I or Level II cleaning, specialized cleaning (if required) and filter baking.

Cleaning Services

• Level I Cleaning:

• Receive filter and inspect • Filter band and seal cleaning • Air flow testing • Pneumatic cleaning • Filter air flow test • Filter repackaging for shipment

• Level II Cleaning:

• Includes Level I Cleaning • Thermal regeneration - 12 hours • Pneumatic cleaning • Filter air flow testing • Filter repackaging for shipment


More Information

Stop by, or call us at 1-800-562-3814 for pricing specifics and turn-around time. Volume discounts, loaner/replacement filters, pick-up and delivery are options.


FSX DPF Cleaning is the best choice


[Click here for a brochure –](#)


[Click here to watch an FSX - DPF Cleaning Video -](#)

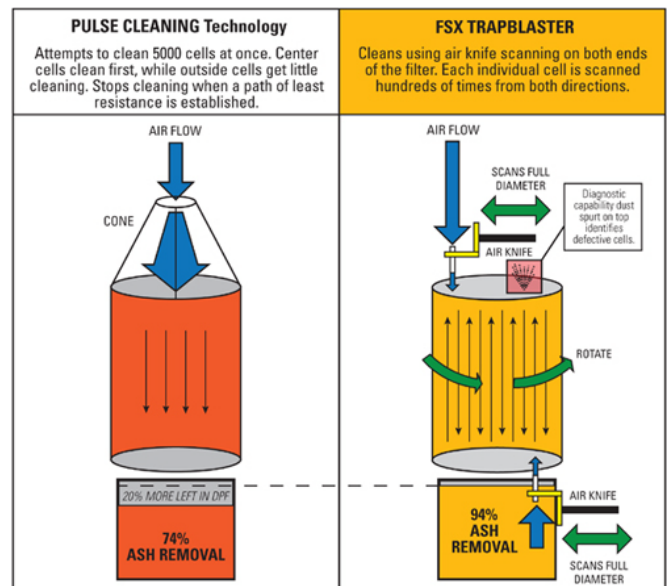

COMPARISON OF PNEUMATIC FILTER CLEANING MACHINES

CLEANING CHARACTERISTICS	SPX	Donaldson	
EACH FILTER CELL IS ADDRESSED INDIVIDUALLY	X	X	✓
CLEANS ON BOTH ENDS OF FILTER	X	X	✓
DIAGNOSTIC CAPABILITY DETECTS FAILED CELLS	X	X	✓
OPERATOR CAN SEE ENTIRE CLEANING PROCESS	X	X	✓
AUTOMATIC CLEANING MODE	✓	✓	✓
MANUAL OVERRIDE OF AUTOMATIC MODE FOR CUSTOM CLEANING	X	X	✓
PERCENTAGE OF DUST REMOVED FROM FILTER	74%	71%	95%

DUST COLLECTION SYSTEM	SPX	DONALDSON	
BUILT-IN OR REMOTE	BUILT-IN	BUILT-IN	REMOTE
NUMBER OF DPFs CLEANED BEFORE PAPER FILTERS NEED CHANGING	50	12	1000+
FILTER COST	\$190	\$207	\$175
DUST COLLECTION SYSTEM INCLUDED IN PRICE OF PNEUMATIC CLEANER	✓	✓	X

ADJUSTABILITY	SPX	DONALDSON	
MAXIMUM & MINIMUM HEIGHT DIMENSIONS OF FILTER	20"	20" / 13"	27" / 5"
HEIGHT ADJUSTMENT	AIR ACTUATED	HAND CRANK	ELECTRIC
MAXIMUM & MINIMUM DIAMETER OF FILTER	15" / 8"	15" / 8"	16" & 9"
DIAMETER ADJUSTMENT	CONE	CONE	ELECTRIC
FITS ALL MANUFACTURERS FILTERS WITHOUT CUSTOM ADAPTERS	X	X	✓
CLEANS UNDER ENCROACHING INLET AND OUTLET FLANGES	X	X	✓
WORKS IF FILTER PUT IN UPSIDE-DOWN	X	X	✓

MECHANICAL	SPX	DONALDSON	
AIR REQUIREMENT	20 CFM ✓	20 CFM ✓	120 CFM
COMPRESSOR INCLUDED	NO	NO	NO
ELECTRICAL	120 VAC	120 VAC	120 VAC
INSTALLATION TIME	30 MINUTES	30 MINUTES	1 HR INCL. DUST COLLECTOR